




6511 Mapleridge • Houston, TX 77081

Stark V- 8 Breathing Air Compressor

- Compressor – Three stage, air cooled
- Flow Rate – 8 CFM free air delivery (FAD) @ 5000 PSI
- Motor – TEFC , 7.5 HP, 220 v. three phase, 16 Amps
- Motor controls and overload protection, NEMA 1 enclosure
- P-24 Purifier - Takes 65677 (desiccant) or 65247 (catalyst) Cartridge
- High pressure shutdown switch (Auto Stop/Manual Re-start)
- Hour meter
- Automatic or manual condensate drain valves
- Oil level sight glass
- Vertical configuration with powder coated chassis
- Dimensions - 24" x 30" x 48" High, weight – 450 pounds



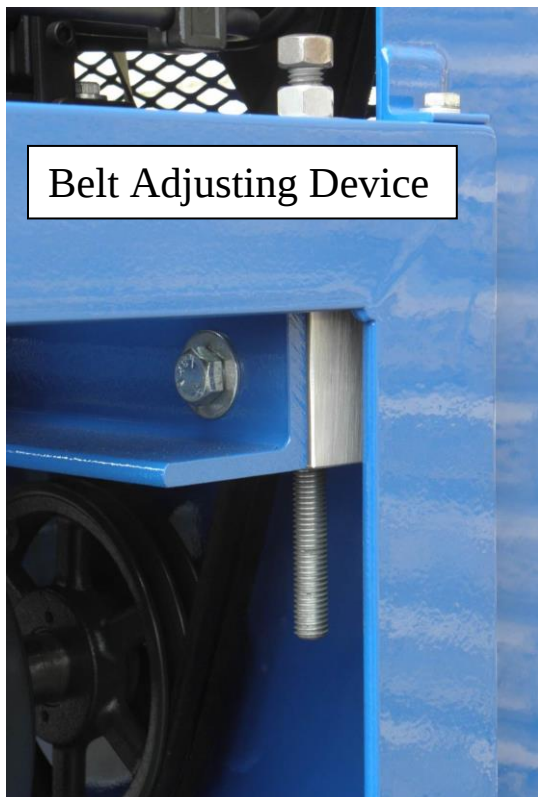

Belt Adjusting Device



ROTATION



Explosion Proof Model

